



DIMENSIONS: 3100 Series

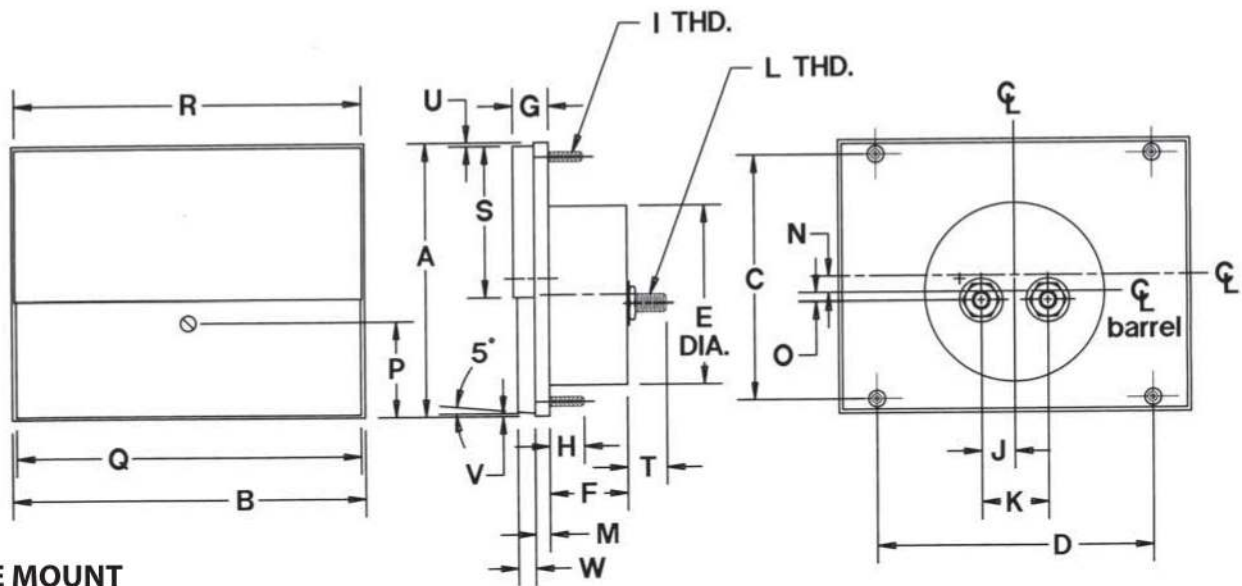

SURFACE MOUNT

MODELS	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
3115-22	1.78	2.24	1.31	1.31	1.50	1.22	0.34	0.50	4-48	0.48	0.97	10-32	0.14	0.03	-.22	0.66	2.14	2.16	0.88	0.50	0.04	0.04	0.16
3125/26	2.29	2.99	1.88	1.88	2.08	1.16	0.40	0.50	4-48	0.48	0.97	10-32	0.16	0.00	0.00	0.86	2.89	2.91	1.23	0.50	0.06	0.04	0.19
3135/36	2.89	3.70	2.25	2.25	2.60	1.16	0.42	0.50	4-48	0.48	0.97	10-32	0.18	0.00	0.12	0.96	3.59	3.62	1.55	0.50	0.06	0.04	0.19
3145/46	3.98	5.10	3.56	4.00	2.60	1.13	0.52	0.50	6-32	0.48	0.97	10-32	0.21	0.24	0.12	1.39	4.98	5.02	2.21	0.50	0.05	0.04	0.25

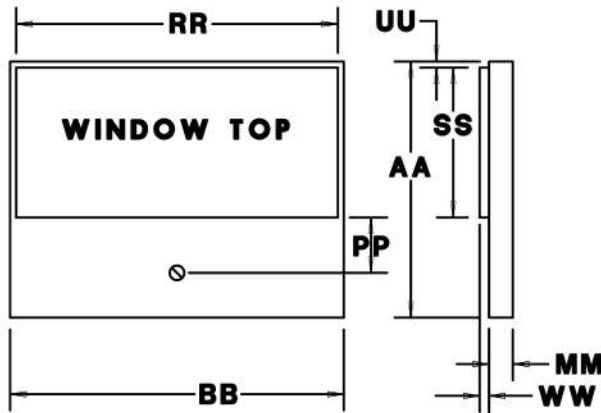

WINDOW MOUNT

MODELS	AA	BB	MM	PP	RR	SS	UU	WW
3115-22	1.78	2.24	.28	.54	2.14	.92	.05	.15
3125/26	2.28	3.01	.30	.64	2.89	1.26	.06	.15
3135/36	2.89	3.72	.32	.81	3.58	1.58	.07	.15
3145/46	4.06	5.19	.37	.86	5.00	2.33	.09	.15

Base is the same as the surface top. See Surface dimensional chart for omitted base dimensions.

Window Mount The window mount design is available in sizes (1-1/2"; 2-1/2"; 3-1/2"; and 4-1/2"). This series is industrially styled and universally accepted with maximum dial visibility. The outside edges of the "window" that project through the panel are clear which yields maximum readability. All specifications and options are identical to those on previous page.

Bezel Mount The Hoyt bezels are available in sizes 2-1/2"; 3-1/2"; and 4-1/2" and offer a custom look to the panel surface. The bezel is molded from high strength plastic material which protects the meter from damage. This design features the zero adjuster within the window envelope therefore negating the requirement for drilling an additional hole. The optional bezel is available for use with the surface case styles and includes necessary mounting hardware.

When Ordering :

- C-8041 (overall size 1 - 3/4" x 1 - 5/32") for 3125/26
- C-8370 (overall size 2 - 5/16" x 3 - 27/32") for 3135/36
- G-8397 (overall size 3" x 5 - 1/4") for 3145/46

Window (HW) & Bezel (HB) Series

Window Mount

