

Input Transformer (Mic Preamp)


Turns ratio: 1+1:7

Primary Impedance:

Primaries in parallel = 1:7, 150ohm

Primaries in series = 1:3.5, 600ohm

Secondary Impedance: 10Kohm

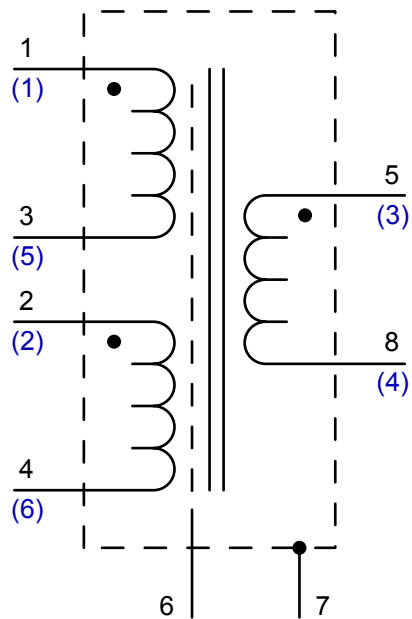


Top numbers = EA2622 PCB pins
(Bottom numbers) = Vintage AP2622 PCB pins
6 = Electrostatic shield
7 = Case ground




PCB mount only
Recommended thru hole size is .041"


Color dot in side label



Top PCB View

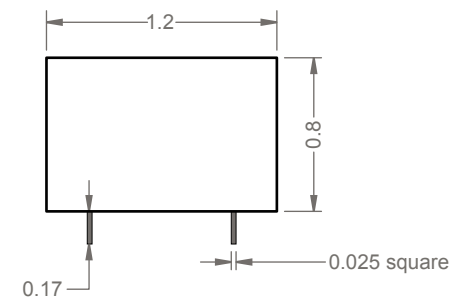

Side View

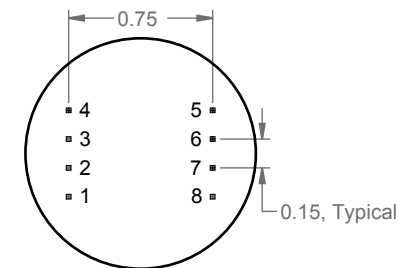

Bottom View

Designed by: Ed Anderson

Drawn: 4/5/2009

Scale: 1:1



Classic Audio Products, Inc.

EA2622 Audio Input Transformer